

FXJ

系列防水防尘防腐接线箱




使用环境 Environment conditions

- 环境温度-25℃至+55℃;
- 安装高度不超过海拔2000m;
- 强酸、强碱、盐、氨、氯离子腐蚀; 多水、多尘、潮湿等环境;
- 广泛应用于石油、化工、码头、食品、制药、军工等工厂企业配线配管。
- Ambient temperature is -25℃ to +55℃.
- The height of installment can't over 2000 meters above sea level.
- They can withstand the corrosion of strong acid, strong alkali, salt, ammonia, chlorine, and the environment of more water, more dust and humidity.
- They are widely used in the lines of petroleum, chemistry, dock, food, medicine, war industry and so on. Wiring and tubing.

型号含义 Model implication

FXJ - □ □ / □ D □ (□) L □ (□) X □ (□) R □ (□)

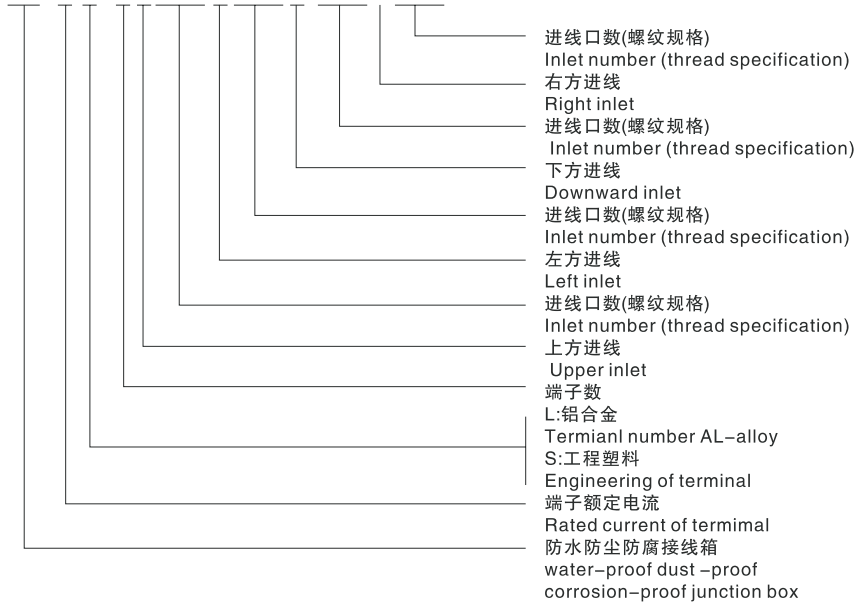

产品特点 Features

- 壳体采用玻璃纤维增强不饱和聚酯树脂模压而成或采用不锈钢成型;
- 螺纹规格可特制, 如NPT螺纹等;
- 主要用于管路配线、配管、接线、分线;
- 此系列产品正常为钢管连接, 电缆进线请注明。
- The casing adopts glass fiber reinforced unsaturated polyester resin molded or stainless steel molding;
- Specification and features of vein, such as NPT vein.

FXJ


Type water-proof dust-proof corrosion-proof junction box

- Mainly used in tubing providing-wire, providing-tube, connecting wire, paneling wire positions
- The series product uses steel tube to connect, electrical inlet-wire must be noted.

技术参数 Technical parameters

产品型号 Type	额定电压(V) Rated voltage	额定电流(A) Rated current	螺纹规格 Thread specification	防腐等级 Corrosion-proof grade	防护等级 Protectoion grade
FXJ-□L	AC380/220V	<400A	用户指定 Decided by user	F1	IP65
FXJ-□S				F2	

外形及安装举例 Outline and mounting example

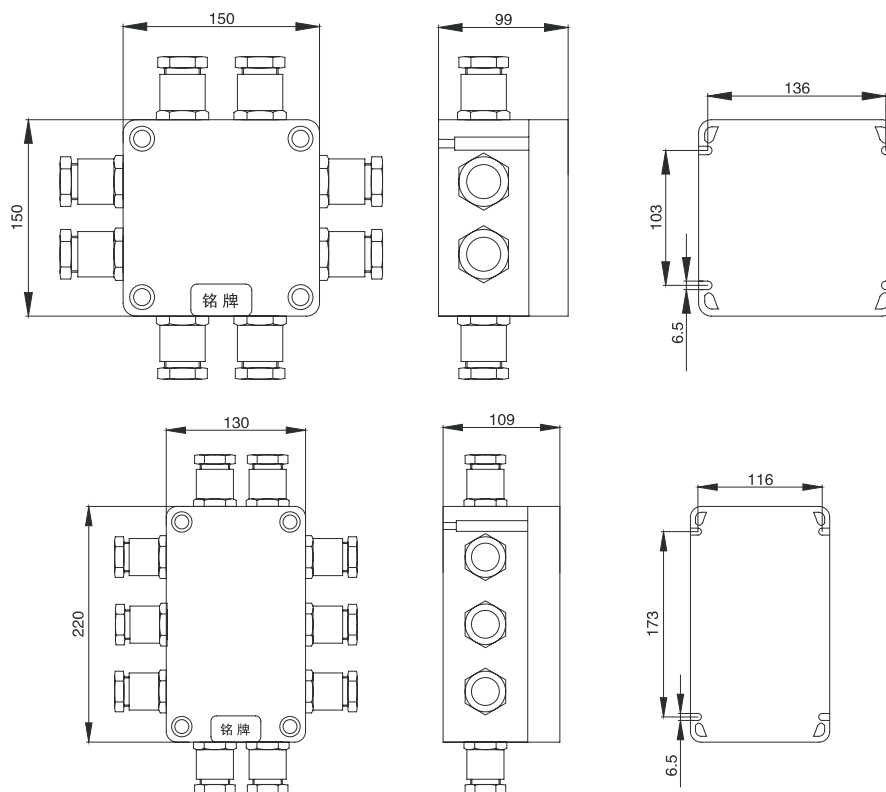

FXJ

系列防水防尘防腐接线箱

