


## LNZ


系列防水防尘操作柱




### 型号含义 Model implication

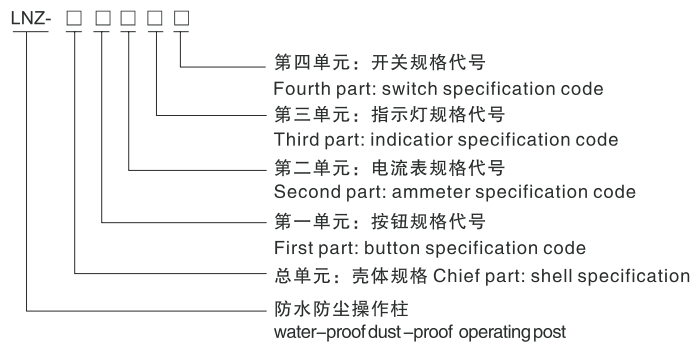


### 总单元含义 Application of chief part

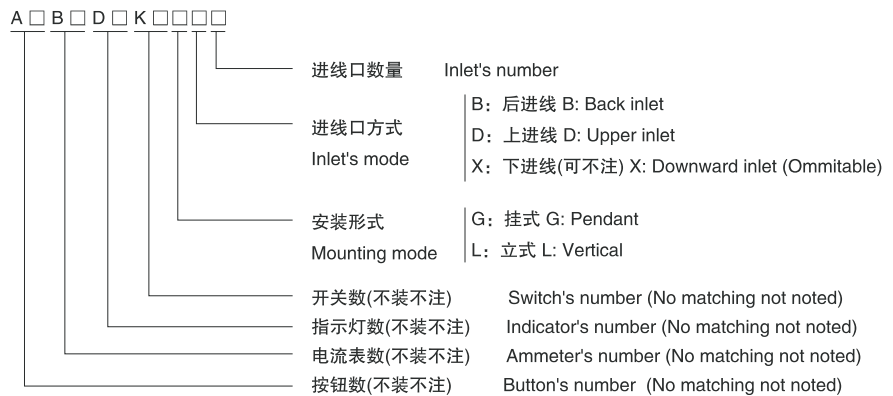

### 第一单元含义 Application of first part

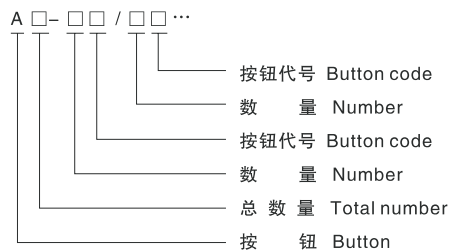


### 第二单元含义 Application of second part

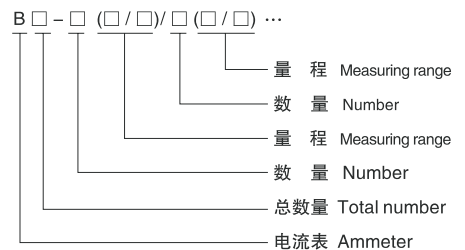

## LNZ

Type water-proof dust -proof  
operating post

### 第三单元含义 Application of third part 第四单元含义 Application of forth part

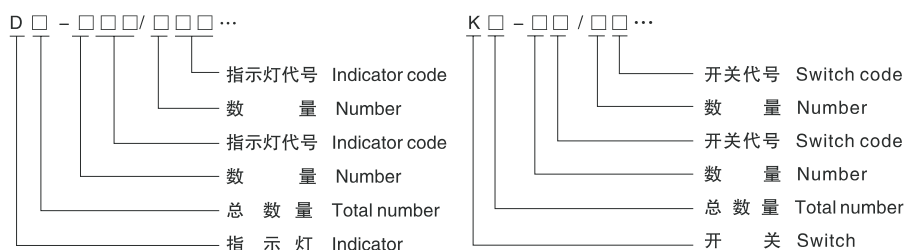

### 使用环境 Environmenr conditions

- 环境温度-25° C至+55° C;
- 安装高度不超过海拔2000m;
- 强酸、强碱、盐、氨、氯离子腐蚀；多水、多尘、潮湿等环境；
- 广泛应用于石油、化工、码头、食品、制药、军工等工厂企业。
- Ambient temperature is-25℃ to +55℃.
- The height of installment can't over 2000 meters above sea level.
- They can withstand the corrosion of strong acid, strong alkali, salt, ammonia, chlorine, and the environment of more water, more dust and humidity.
- They are widely used in the lines of pertroleum, chemistry, dock, food, medicine, war industry and so on.

### 产品特点 Features

- 壳体采用ZL102铝合金压铸而成，结构轻巧，外型美观；
- 壳体表面酸洗。钝化后采用高压静电喷塑处理，抗酸、碱、盐腐蚀，防腐等级为F1
- 本产品采用曲路密封结构，直接用紧固件紧固，具有良好的防水、防尘性能，防护等级IP65
- 所有外露紧固件均用不锈钢，密封件采用硅橡胶，耐油、耐酸、耐碱、耐高温、抗老化；
- 本系列产品适用于交流50Hz，电压380V以下，直流至440V以下，电流10A以内的控制电路中，作为工作现场中电动机的起停、控制转换、信号切换、仪表计量显示等之用；
- 内装元件由公司定型；
- 内装元件主要有：万能转换开关、按钮、电流表、指示灯等，可按用户要求装其他仪表。可实现各种元件的任意组合，满足用户设计要求；
- 一般情况下，本系列产品的进出线方向为下进下出、电缆布线。用户有特殊要求请注明；
- 产品出厂铭牌上只体现总单元内容，各分单元代号为订货参数。

## LNZ

### 系列防水防尘操作柱

- The shells are made of ZL 102 alloy aluminium,with delicated structure and beautiful shape.
- The surface of the shells after acid-washing rid of rust usee the treatment of high-pressure static and epoxy resin.It can with stand the products tion class reaches IP65.
- All products adopts curve-sealing structure,and are tighten by the fix terminal,they have performance of and dust-proof,the protec tion class redches Ip65.
- All the leakage fixers adopt stainless steel,adop silicon rubberm,they can withshand oil high temperature and are not easy to age.
- The products are used in the controlling circuits with 50Hz AC,less than 350V voltage,less than 400V DC, less than 10A current.Thpe are used to dispay the starting and stopping of motor, controlling shift,meter measure.
- The elements used in installing inside,which are decided by our company.
- The inside installment elements are mainly shift switches,buttons,current meters and indicator. The otre meters can be installed according to the demand of the users.Meanwhile,they can cater t the designing of the users to assemble freely.
- In general,In-Out wires of wires of the products of the series go under-out, installment with cable.The special demand of the users must be noted.
- the factory brand of the products manifest the content of the whole unit,code is ordering parameter.


### 技术参数 Technical parameters

使用类别 Using sort	额定电压(V) Rated voltage	额定电流(A) Rated current	防护等级 Protectoion grade	防腐等级 Corrosion- proof grade	电缆规格 (Φ,mm) Cable' s spec	进线口规 格(G" ) Pole' s spec.
AC-3 AC-4	AC380/220V	10A	IP65	WF1	11~18	1

# LNZ


Type water-proof dust -proof operating post

## 外形及安装举例 Outline and mounting example

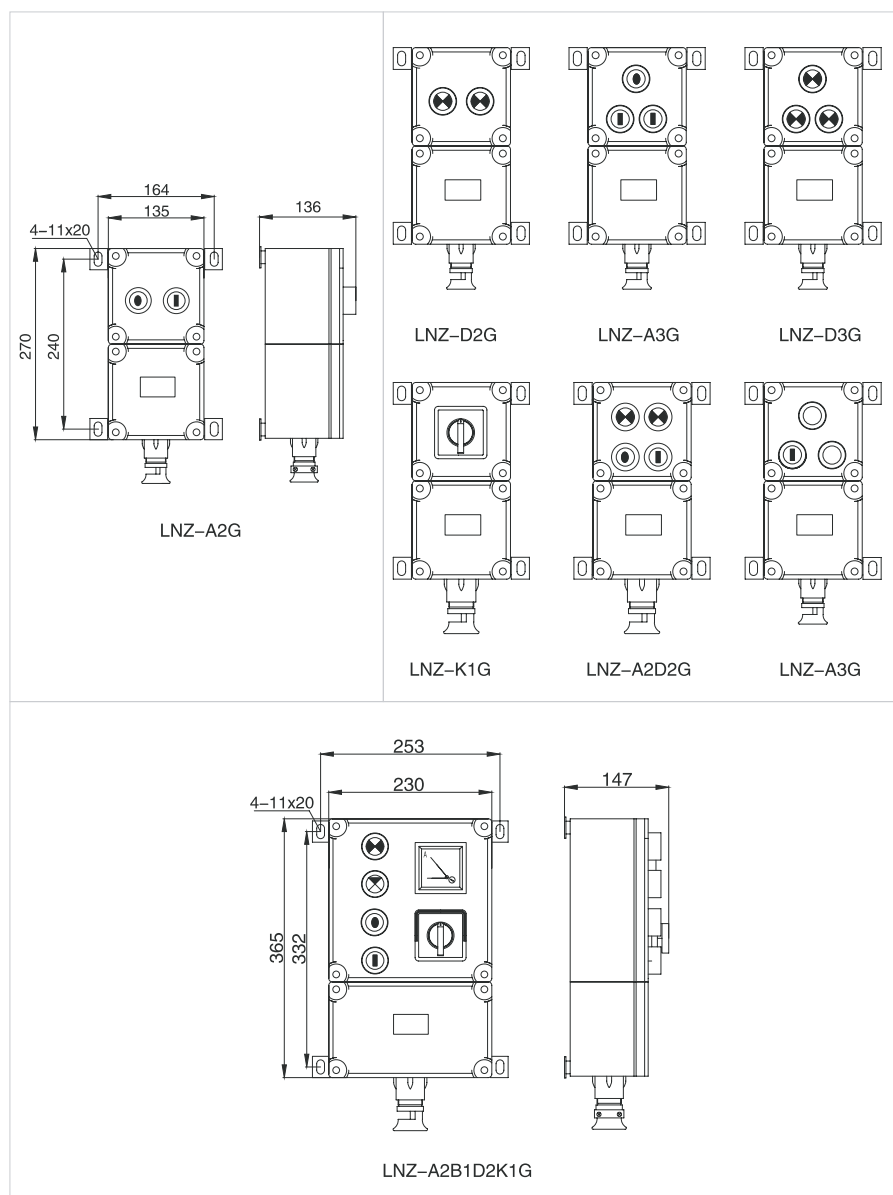

## LNZ

系列防水防尘操作柱

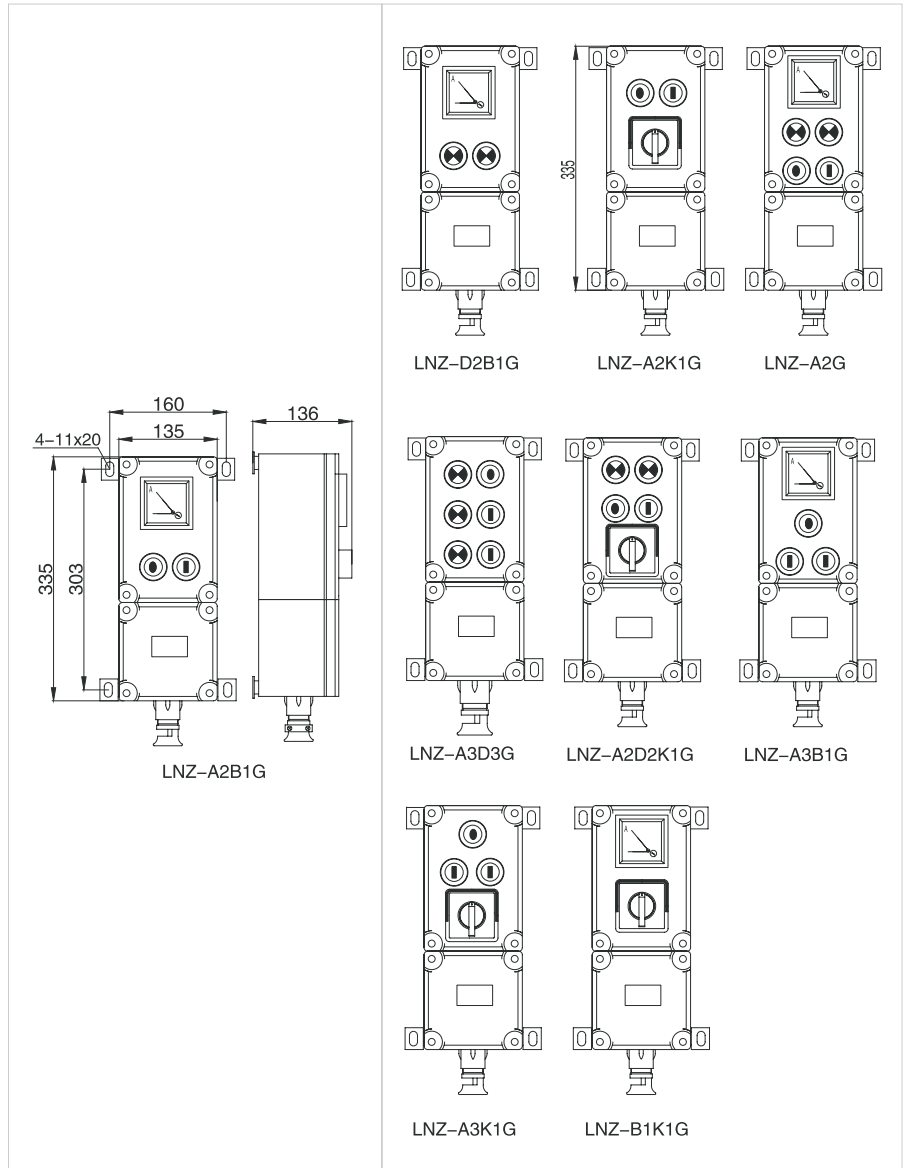

指示灯   
  常闭按钮   
 | 常开按钮   
 A 电流表   
 | 转换开关

注：以上举例仅为挂式，当用作立柱式进，取消安装架换上相应的引入装置。